



**Bobcat®**

## Compact Tractors

CT4045 | CT4050 | CT4055 | CT4058



*One To*



A woman with brown hair, wearing a blue and white plaid shirt over a grey V-neck top, is driving a white Bobcat tractor. She is looking towards the camera with a slight smile. The tractor has orange safety lights on its sides and a Bobcat logo on the front. The background shows green trees and a clear blue sky.



# IT TAKES HARD WORK TO LIVE THE SIMPLE LIFE

**THE BOBCAT BRAND** was literally born in a barn. Designed for a turkey farmer, the first compact loader was destined to clean small livestock pens and stalls. Ever since, Bobcat® equipment has been a mainstay on ranches, dairies and all kinds of fruit, grain and vegetable operations. If there's one thing we've learned about life on the farm, it's that you'll never run out of things to do.

Your lifestyle is a perfect match for the Bobcat work style. With a lineup of 15 powerful compact tractors, Bobcat delivers performance, ease of use, versatility... everything you need to make the most of your land. And it comes in a machine that's familiar, comfortable and durable enough to be worthy of the world's hardest-working brand.

The simple life is busier than most people think.  
Get the only tractor that's tough enough to



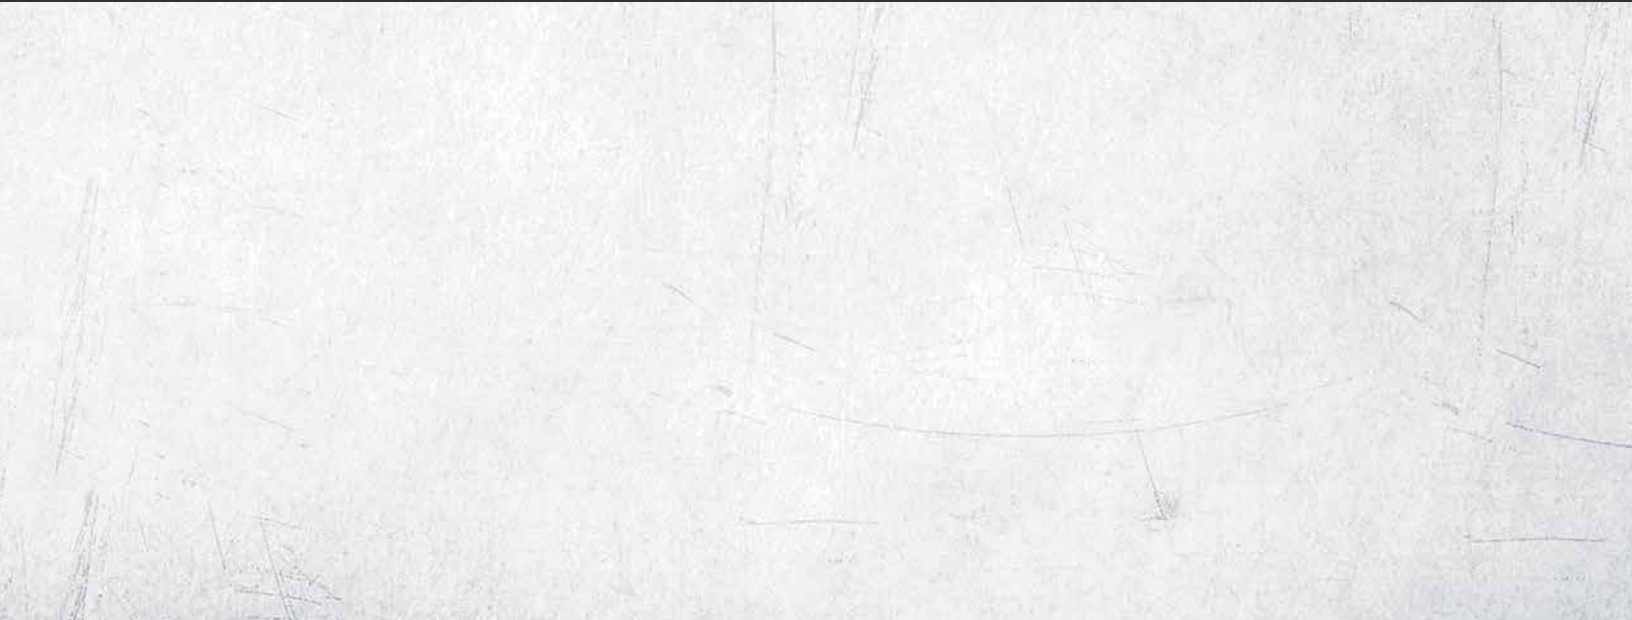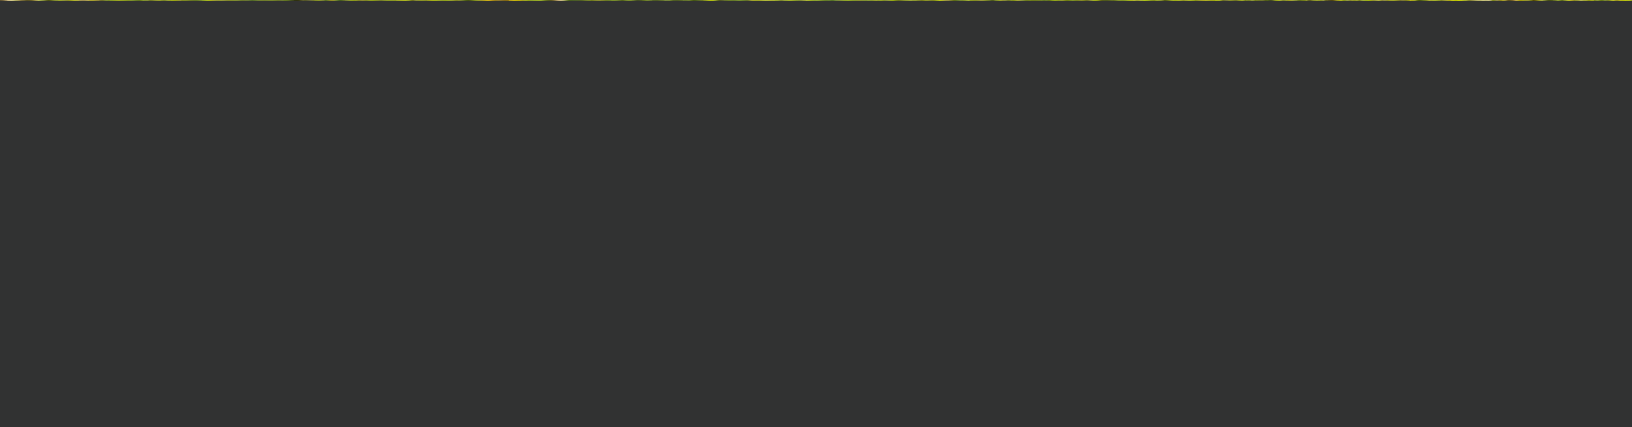

**Stable Wheelbase**

The 71.2-inch wheelbase of the 4000 platform tractors maximizes your towing capacity and optimally distributes weight to each wheel for more stability on hilly terrain.

**More Ground Clearance**


Class-leading ground clearance improves maneuverability in rough or muddy terrain.

**Manual or Hydrostatic Transmission**

Pick a model that works for you, with the controls and capabilities that fit your preference, budget and working style.

**Manual Synchro Shuttle Transmission**

Manual synchro shuttle transmission enables shift-on-the-fly

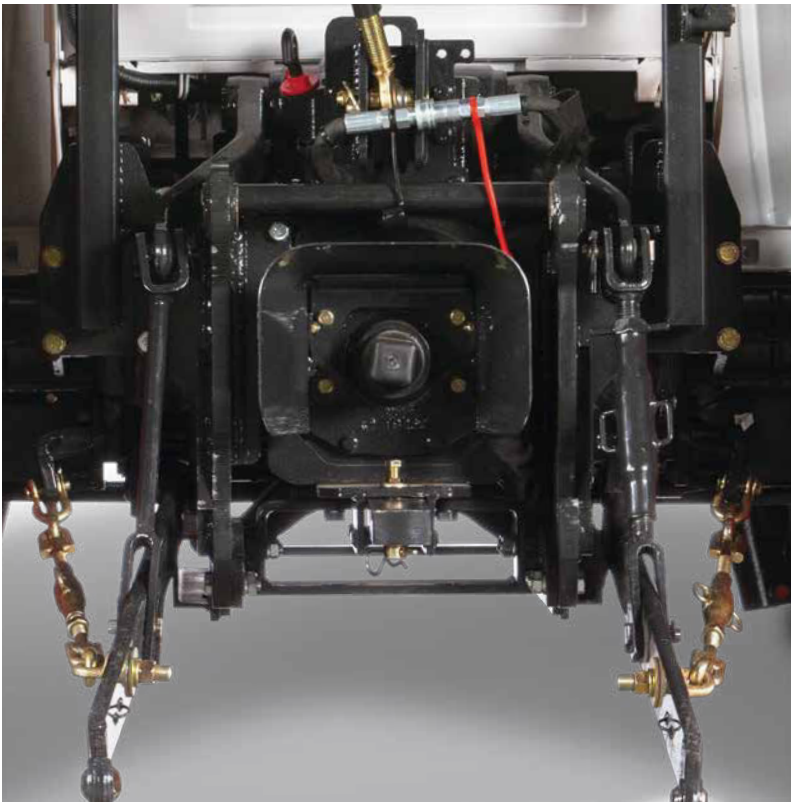



**Tier 4 Diesel Engine**

The powerful Tier 4 engines offer robust, high-power performance, plus an efficient fuel system. You'll enjoy reliable tractor start-ups and long component life, as well as low noise and vibration for comfortable work.

**Metal Hood**

The metal hood, designed to provide great visibility from the operator station, stands up to tough jobs, reliably protecting the engine and components from dirt and debris.

**Polymer Fuel Tank**

A heavy-duty polymer fuel tank maintains fuel integrity and eliminates rust-related contamination.

**Brush Guard**

Included with the optional front-end loader and also available separately, the heavy-duty brush guard protects your tractor's front end from debris,





## COMFORT



### Low Noise, Low Vibration

The engine in your Bobcat compact tractor is designed to produce low noise levels with minimal vibration to keep you working comfortably and focused on the task.

### Headlights

Bright headlights illumins

### Foldable Roll-Over Protective Structure (ROPS)

The ROPS is designed to protect the operator in the event of a roll-over (when the ROPS is locked in the up position and the seat belt is fastened). The foldable ROPS can be temporarily lowered when driving under trees, into garages or in other low-clearance areas.





VERSATILITY

# DO MORE WITH ONE MACHINE

From mowing to grading to digging, your property presents endless opportunities to get outside and get something done. From front to back, Bobcat tractors are well equipped for it.



## Rear PTO and 3-Point Hitch

The 3-point hitch is a key to your tractor's versatility. It enables you to do a large number of tasks on your property with both drag-behind and PTO-powered implements.

## Flip-Up PTO Guard

*Image shows optional backhoe sub frame installed.*







Hard-working Bobcat implements and attachments are made to handle the numerous possibilities you uncover on your land.

Bobcat provides you access to a world of Bobcat implements and front-end loader attachments – so you can get the most work from your tractor investment. Whether it's moving snow, installing a fence or taking care of animals, when you have the right tractor and the right implement or attachment, there is virtually no task that's beyond your ability.

There are more than 550 dealer locations in North America, so you're never far from an expert source of implements, attachments, accessories, parts and service.



*Rear ballast*



*3 pt. box blade*









*3 pt. rotary cutter*




*3 pt. tiller*



SPECIFICATIONS

|   |  |  |  |  |  |  |
|---|---|---|---|--|---|---|
| Model   | CT4045 HST  | CT4045 SST  | CT4050 HST  | CT4050 SST   | CT4055 SST  | CT4058 HST  |
| Engine  | Diesel  | Diesel  | Diesel  | Diesel   | Diesel  | Diesel  |
| Gross Horsepower                                  | 44.9 hp (33.5 kW)   | 44.9 hp (33.5 kW)   | 50.3 hp (37.3 kW)   | 50.3 hp (37.3 kW)  | 55.0 hp (41.0 kW)   | 57.7 hp (43.0 kW)   |
| No. of Cylinders                                  | 3   | 3   | 3   | 3  | 3   | 3   |
| Total Displacement                                | 111.4 cu. in. (1.8 L)   | 111.4 cu. in. (1.8 L)   | 111.4 cu. in. (1.8 L)   | 111.4 cu. in. (1.8 L)  | 111.4 cu. in. (1.8 L)   | 111.4 cu. in. (1.8 L)   |
| Fuel Tank Capacity                                | 12.7 gal. (48.0 L)  | 11.9 gal. (45.0 L)  | 12.7 gal. (48.0 L)  | 11.9 gal. (45.0 L)   | 11.9 gal. (45.0 L)  | 12.7 gal. (48.0 L)  |
| 3-Point, PTO & Hydraulics                         |   |   |   |  |   |   |
| PTO Horsepower                                    | 32.8 hp (24.5 kW)   | 41.6 hp (31.0 kW)   | 39.3 hp (29.3 kW)   | 45.6 hp (34.0 kW)  | 49.6 hp (37.0 kW)   | 45.1 hp (33.7 kW)   |
| 3-Point Hitch                                     | Category 1  | Category 1  | Category 1  | Category 1   | Category 1  | Category 1  |
| Lift Control Type                                 | Hydraulic Position Control System   | Hydraulic Position Control System   | Hydraulic Position Control System   | Hydraulic Position Control System  | Hydraulic Position Control System   | Hydraulic Position Control System   |
| 3-Point Lift Capacity                             | 2716 lb. (1232 kg)  | 2716 lb. (1232 kg)  | 2716 lb. (1232 kg)  | 2716 lb. (1232 kg)   | 2716 lb. (1232 kg)  | 2716 lb. (1232 kg)  |
| Rear PTO  | 540 rpm   | 540 rpm   | 540 rpm   | 540 rpm  | 540 rpm   | 540 rpm   |
| Rear PTO System                                   | Independent   | Independent   | Independent   | Independent  | Independent   | Independent   |
| Mid-PTO   | Optional: 2119 rpm  | —   | Optional: 2119 rpm  | —  | —   | Optional: 2119 rpm  |
| Total Hydraulic Pump Capacity                     | 16.5 gpm (62.4 L/min.)  | 14.1 gpm (53.4 L/min.)  | 16.5 gpm (62.4 L/min.)  | 16.5 gpm (62.4 L/min.)   | 14.1 gpm (53.4 L/min.)  | 16.5 gpm (62.5 L/min.)  |
| Rear Hydraulics                                   | 1 Pair Std (2nd Pair Opt)   | Opt 2 Pairs   | 1 Pair Std (2nd Pair Opt)   | Opt 2 Pairs  | Opt 2 Pairs   | 1 Pair Std (2nd Pair Opt)   |
| 3-Point Link Stabilizers                          | Turnbuckle  | Turnbuckle  | Turnbuckle  | Turnbuckle   | Turnbuckle  | Turnbuckle  |
| Lower Links                                       | Rigid   | Rigid   | Rigid   | Rigid  | Rigid   | Rigid   |
| Lifting Rod                                       | Turnbuckle  | Turnbuckle  | Turnbuckle  | Turnbuckle   | Turnbuckle  | Turnbuckle  |
| Drive System                                      |   |   |   |  |   |   |
| Standard Transmission                             | 3-Range HST   | 8F X 8R Synchro   | 3-Range HST   | 8F X 8R Synchro  | 8F X 8R Synchro   | 3-Range HST   |
| Brakes  | Wet Multi-disc  | Wet Multi-disc  | Wet Multi-disc  | Wet Multi-disc   | Wet Multi-disc  | Wet Multi-disc  |
| Rear Differential Lock                            | Std   | Std   | Std   | Std  | Std   | Std   |
| Four-Wheel Drive                                  | Std   | Std   | Std   | Std  | Std   | Std   |
| Travel Speeds (w/ Ind. Tires)                     |   |   |   |  |   |   |
| Forward   | 18.5 mph<br>(29.7 km/hr.)   | 17.5 mph<br>(28.2 km/hr.)   | 18.5 mph<br>(29.7 km/hr.)   | 17.5 mph<br>(28.2 km/hr.)  | 17.5 mph<br>(28.2 km/hr.)   | 18.5 mph<br>(29.7 km/hr.)   |
| Reverse   | 12.9 mph<br>(20.8 km/hr.)   | 17.1 mph<br>(27.6 km/hr.)   | 12.9 mph<br>(20.8 km/hr.)   | 17.1 mph<br>(27.5 km/hr.)  | 17.1 mph<br>(27.1 km/hr.)   | 12.9 mph<br>(20.8 km/hr.)   |
| Dimensions  |   |   |   |  |   |   |
| Overall Length (w/ 3 pt.)                         | 125.5 in. (3189 mm)   | 125.5 in. (3189 mm)   | 125.5 in. (3189 mm)   | 125.5 in. (3189 mm)  | 125.5 in. (3189 mm)   | 125.5 in. (3189 mm)   |
| Overall Width                                     |   |   |   |  |   |   |
| Ag Tires  | 67.0 in. (1702 mm)  | 67.0 in. (1702 mm)  | 67.0 in. (1702 mm)  | 67.0 in. (1702 mm)   | 67.0 in. (1702 mm)  | 67.0 in. (1702 mm)  |
| Industrial Tires                                  | 69.8 in. (1722 mm)  | 69.8 in. (1722 mm)  | 69.8 in. (1722 mm)  | 69.8 in. (1722 mm)   | 69.8 in. (1722 mm)  | 69.8 in. (1722 mm)  |
| Turf Tires  | 72.2 in. (1834 mm)  | 72.2 in. (1834 mm)  | 72.2 in. (1834 mm)  | 72.2 in. (1834 mm)   | 72.2 in. (1834 mm)  | 72.2 in. (1834 mm)  |
| Overall Height                                    | 97.4 in. (2473 mm)  | 97.4 in. (2473 mm)  | 97.4 in. (2473 mm)  | 97.4 in. (2473 mm)   | 97.4 in. (2473 mm)  | 97.4 in. (2473 mm)  |
| Wheelbase   | 71.2 in. (1810 mm)  | 71.2 in. (1810 mm)  | 71.2 in. (1810 mm)  | 71.2 in. (1810 mm)   | 71.2 in. (1810 mm)  | 71.2 in. (1810 mm)  |
| Ground Clearance (w/ industrial tires)            | 15.3 in. (387 mm)   | 15.3 in. (387 mm)   | 15.3 in. (387 mm)   | 15.3 in. (387 mm)  | 15.3 in. (387 mm)   | 15.3 in. (387 mm)   |
| Weight  | 3745 lb. (1698 kg)  | 3745 lb. (1698 kg)  | 3745 lb. (1698 kg)  | 3745 lb. (1698 kg)   | 3745 lb. (1698 kg)  | 3745 lb. (1698 kg)  |
| Steering  | Hydrostatic Power Steering  | Hydrostatic Power Steering  | Hydrostatic Power Steering  | Hydrostatic Power Steering   | Hydrostatic Power Steering  | Hydrostatic Power Steering  |
| Inside Turning Radius (w/ assisted braking)       | 103.5 in. (2630 mm)   | 103.5 in. (2630 mm)   | 103.5 in. (2630 mm)   | 103.5 in. (2630 mm)  | 103.5 in. (2630 mm)   | 103.5 in. (2630 mm)   |
| Tilt Steering Wheel                               | Std   | Std   | Std   | Std  | Std   | Std   |
| Safety Equipment                                  |   |   |   |  |   |   |
| Safety Interlock System (neutral start-operating) | Std   | Std   | Std   | Std  | Std   | Std   |
| Fold Down ROPS (roll-over protective structure)   | Std   | Std   | Std   | Std  | Std   | Std   |
| Fully Retractable Seat Belt                       | Std   | Std   | Std   | Std  | Std   | Std   |
| Features  |   |   |   |  |   |   |
| Adjustable Seat                                   | Std   | Std   | Std   | Std  | Std   | Std   |
| Cup Holder  | Std   | Std   | Std   | Std  | Std   | Std   |
| Glow Plug Engine Pre-heat                         | Std   | Std   | Std   | Std  | Std   | Std   |
| Toolbox   | Std   | Std   | Std   | Std  | Std   | Std   |
| Head Lights/Tail Lights/ Brake Lights             | Std   | Std   | Std   | Std  | Std   | Std   |
| Cruise Control                                    | Opt   | —   | Opt   | —  | —   | Opt   |
| Spark Arrestor Muffler                            | Std   | Std   | Std   | Std  | Std   | Std   |
| Horn/Hazard Flasher/Turn Signals                  | Std   | Std   | Std   | Std  | Std   | Std   |
| Rear Working Light                                | Opt   | Opt   | Opt   | Opt  | Opt   | Opt   |
| Side Mirror                                       | Opt   | Opt   | Opt   | Opt  | Opt   | Opt   |

\*Note: Hydraulic 3 pt. lift capacity will vary depending on lift point height.

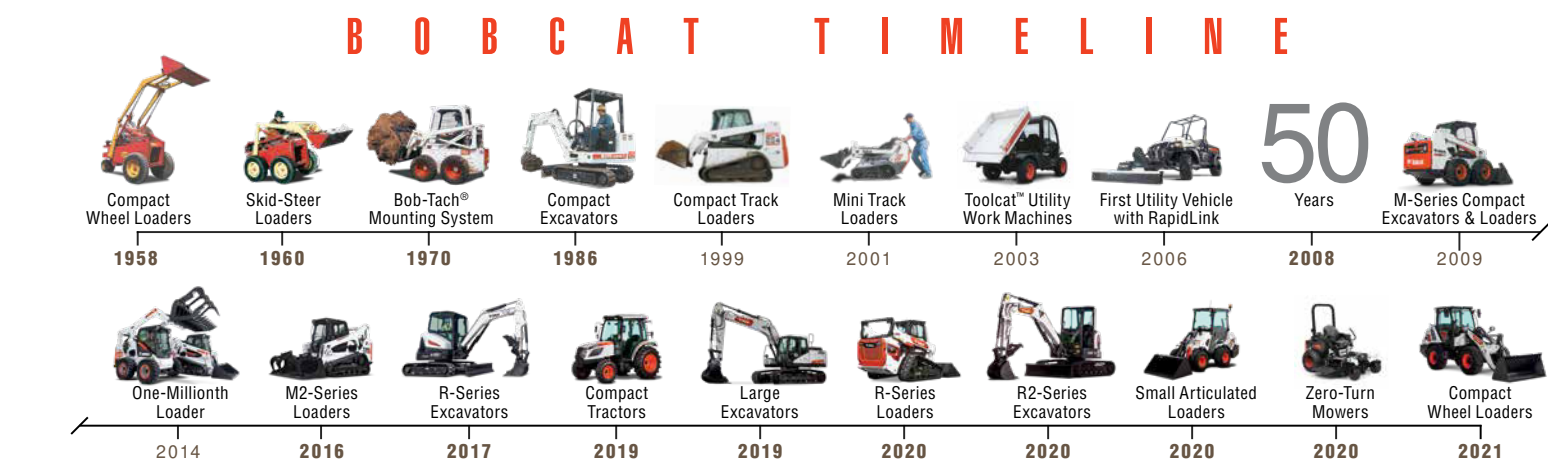





# YOU ARE ONE TOUGH ANIMAL<sup>®</sup>

Everything we put into Bobcat equipment is designed to make more of whatever you bring to the job. Whether it's strength, versatility, speed or agility, it's built around you.

Certain specification(s) are based on engineering calculations and are not actual measurements. Specification(s) are provided for comparison purposes only and are subject to change without notice. Specification(s) for your individual Bobcat equipment will vary based on normal variations in design, manufacturing, operating conditions, and other factors.



Bobcat Company is a member of the Doosan Group. Doosan is a global leader in construction, grounds maintenance and material handling equipment, power and water solutions, and engineering that has proudly served customers and communities for more than a century. Bobcat<sup>®</sup>, the Bobcat logo and the colors of the Bobcat machine are registered trademarks of Bobcat Company in the United States and various other countries. ©2022 Bobcat Company. All rights reserved.



Printed on 10% recycled paper

**B-2282 (02/22)**  
EP-XX-0222-80404-F

**Bobcat Company**  
250 East Beaton Drive • West Fargo, ND 58078

**Bobcat.com**



**Bobcat<sup>®</sup>**

***One Tough Animal.***